

**Product Information**

Product Detail MED5630HW, Maytag® Front Load Electric Dryer with Extra Power and Quick Dry cycle - 7.3 cu. ft.,  
(0300/10 Sales Status: Active)

**Maytag****Product Bulletin**

<b>New Search</b>
<b>Master SKU Info</b>
<b>Features</b>
<b>Specifications</b>
<b>Dimensions</b>
<b>Images</b>
<b>Documents</b>
<b>Relationships</b>
<b>Bulletin</b>

<b>Product Correction</b>
---------------------------

**Dimensions**

Capacity(FT3,cubic feet)	7.30
Depth With Door Open 90 Degree(IN, inches)	51
Depth(IN, inches)	30 3/4
Height(IN, inches)	38 3/4
Width (IN, inches)	27

**Description**

Fuel Type	Electric
-----------	----------

**Exterior**

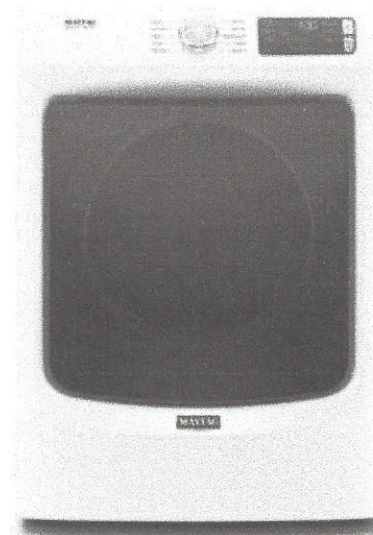
Door Style	Side Swing
Door Swing	Right
Reversible Door	Yes
Window	Yes

**Controls**

Electronic Display Type	Cycle Indicator Lights
Feedback-Status Indicators	Check Vent Cool Down Damp Sensing Wet
Location of Controls	Front
Type of Control	Dials
End of Cycle Signal	Yes

**Features**

Automatic Dry Control	Yes
Cycle Time Remaining	Yes
Moisture Sensor	Yes
Pedestal Options	Yes
Stackable	Yes

**Selling Features**

- \* Extra Power Button
- \* Advanced Moisture Sensing
- \* Quick Dry Cycle
- \* Maytag® Commercial Technology
- \* Sanitize Cycle

**Warranty Coverage**

UPC: 883049457642

Country of Origin: USA

**Dimensions In.**

Carton Depth	32 1/2
Carton Height	40 3/4
Carton Width	28 1/2
Depth	30 3/4
Height	38 3/4
Width	27
Gross Weight	175
Net Weight	157.6

<b>Cycles</b>	
Number of Dryer Cycles	10
Selection of Drying Cycles	Bulky Items Delicates Heavy Duty Normal Quick Dry Regular Timed Dry Towels Whites Wrinkle Control
<b>Options</b>	
Dryer Option Selections	Control Lock Cycle Signal Wrinkle Prevent
<b>Temperature Settings</b>	
Number of Temperatures	4
Temperature Selection	High Low Medium Air Only
<b>Modifiers</b>	
Selection of Drying Levels	More Less Normal
<b>Modifiers</b>	
Number of Dryness Levels	3
<b>Details</b>	
Drum Material	Powder Coat
Lint Screen Location	Front
Quad Baffles	Yes
<b>Installation Considerations</b>	
Maximum Vent Length (ft.)	64
Venting Direction	Left, Right, Bottom, Rear

**Certifications**

ADA Compliant	ADA Compliant with feet fully extended
CEE Tier	Tier I
Energy Star® Qualified	ENERGY STAR® Qualified
Prop 65	Standard
UL	•

**Electrical**

Amps	30
Hz	60
Volts	240